

WEST Search History

[Hide Items](#)[Restore](#)[Clear](#)[Cancel](#)

DATE: Friday, December 08, 2006

Hide?	Set Name	Query	Hit Count
	<i>DB=PGPB,USPT,USOC,EPAB,JPAB,DWPI,TDBD; PLUR=YES; OP=ADJ</i>		
<input type="checkbox"/>	L16	L15 and string and byte and char	20
<input type="checkbox"/>	L15	L12 and (user-defined near type)	46
<input type="checkbox"/>	L14	L12 and user-defined	294
<input type="checkbox"/>	L13	L12 and casting	57
<input type="checkbox"/>	L12	L11 and (conver\$ or translat\$)	1008
<input type="checkbox"/>	L11	L10 and compil\$	1257
<input type="checkbox"/>	L10	L9 and (operand and operator)	2475
<input type="checkbox"/>	L9	(data near (type\$ or typing))	129284
<input type="checkbox"/>	L6	L5 and conver\$	44
<input type="checkbox"/>	L5	L4 and (operand and operator)	195
<input type="checkbox"/>	L4	L3 and (data near (type\$ or typing))	1817
<input type="checkbox"/>	L3	717/106-119,136-144.ccls.	4751
<input type="checkbox"/>	L2	20050097532	2
<input type="checkbox"/>	L1	6067413.pn.	2

END OF SEARCH HISTORY

Google

[Web](#) [Images](#) [Video](#) [News](#) [Maps](#) [more »](#)

"data type" operand operator "type conversion"

[Search](#)

[Advanced Search](#)
[Preferences](#)

Web

Results 1 - 10 of about **44,200** for **"data type" operand operator "type conversion" string char**. (0.38 seconds)

Kednos PL/I for OpenVMS Systems

The concatenation **operator** produces a single **string** from two strings specified as **operands**. ... 6.4 **Data Type Conversion** of **Operands** and Expressions ...
www.kednos.com/pli/docs/REFERENCE_MANUAL/6291pro_017.html - 30k -
[Cached](#) - [Similar pages](#)

Type Conversion

The **operand** types of an **operator** invocation are resolved following the procedure ...
("blank-padded **char**", the internal name of the character **data type**) to ...
www.redhat.com/docs/manuals/database/RHDB-2.0-Manual/sql/typeconv.html - 34k -
[Cached](#) - [Similar pages](#)

Type Conversion

If a type is not specified for a **string**, then the placeholder type ... So the parser does a **type conversion** on both **operands** and the query is equivalent to ...
www.redhat.com/docs/manuals/database/RHDB-7.1.3-Manual/sql/typeconv.html - 30k -
[Cached](#) - [Similar pages](#)

Implicit Data Type Conversion

The following sections summarize when implicit **data type conversion** occurs ... For example, **operands** to arithmetic **operators** are converted to numeric data ...
www.enterprisedb.com/documentation/implicit-datatype-conv.html - 31k -
[Cached](#) - [Similar pages](#)

[PPT] Microsoft® Office Access 2003 Training

File Format: Microsoft Powerpoint - [View as HTML](#)
The logical negation **operator** takes a Boolean **operand**. The result is the logical ... CStr—
Convert to **String** type. CSD BITS Pilani. **Data Type Conversion**... ...
www.bits-pilani.ac.in:12360/courses/CSDC106/coursematerial/LectureSlides/Lecture2.ppt -
[Similar pages](#)

Collation Precedence (Transact-SQL)

Collation precedence is determined after **data type conversion**. ... The UNION **operator** is also collation sensitive, and all **string operands** and the final ...
msdn2.microsoft.com/en-us/library/ms179886.aspx - 28k - [Cached](#) - [Similar pages](#)

Troubleshooting Data Types

Mod **Operator** Does Not Return Accurate Result Mod **Operator** Does Not Return ... The **String data type** does not widen to the **Char Data Type** (Visual Basic). ...
msdn2.microsoft.com/en-us/ae382yt8.aspx - 27k - [Cached](#) - [Similar pages](#)

[PPT] Chapter 2 Primitive Data Type and Operations

File Format: Microsoft Powerpoint - [View as HTML](#)
Character **Data Type**. **char** letter = 'A'; (ASCII) ... The left-hand **operand** of a binary **operator** is evaluated before any part of the right-hand **operand** is ...
cs.nyu.edu/courses/fall03/V22.0101-002/02slide.ppt - [Similar pages](#)

HP OpenVMS systems documentation

You can also apply some of the relational **operators** to **string operands** and to set **operands**. ... LENGTH component of a **STRING** (or VARYING OF **CHAR**) type. ...
h71000.www7.hp.com/DOC/82final/6083/6083pro_007.html - 40k - [Cached](#) - [Similar pages](#)

XPath Expression Syntax

A variable may take a value of any **data type** (**string**, number, boolean, node-set, ... The

operators, when used in an XSL stylesheet, will need to be written ...
saxon.sourceforge.net/saxon6.5.3/expressions.html - 28k - [Cached](#) - [Similar pages](#)

Result Page: [1](#) [2](#) [3](#) [4](#) [5](#) [6](#) [7](#) [8](#) [9](#) [10](#) **[Next](#)**

Try [Google Desktop](#): search your computer as easily as you search the web.

[Search within results](#) | [Language Tools](#) | [Search Tips](#) | [Dissatisfied? Help us improve](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2006 Google

YAHOO! SEARCH

"data type" operand operator "type conversion" string char

Search

[Answers](#) | [Search Services](#) | [Advanced Search](#) | [Preferences](#)

Search Results

1 - 10 of about 933 for "[data type](#)" [operand operator](#) "[type conversion](#)" [string char](#) - 0.34 sec. ([About this page](#))

Type Conversion

data item has an associated **data type** which determines its behavior and allowed usage. ...

ing Concatenation Operator Type Resolution ...

w.redhat.com/docs/manuals/database/RHDB-2.1-Manual/sql/typeconv.html - 34k - [Cached](#) -

[More from this site](#)

Type Conversion

data item has an associated **data type** which determines its behavior and allowed usage. ...

PostgreSQL **operator** catalog has only one entry for factorial, ...

hat.com/docs/manuals/database/RHDB-7.1.3-Manual/sql/typeconv.html - 30k - [Cached](#) -

[More from this site](#)

[p://www-](#)

[atic.cc.gatech.edu/classes/AY2003/cs1322_spring/lectures/CS2_04_Ch3_Fundamental_Data_Ty...](#)

ICROSOFT POWERPOINT)

learn about the **char data type**. To learn how to read program input ... **Type Conversion**.

assignment, types generally must match. double total = "a lot" ...

w-static.cc.gatech.edu/classes/AY2003/cs1322_spring/lectures/... - 235k - [View as html](#) -

[More from this site](#)

Basic Syntactical and Lexical Issues

ar charAt(int index) The equals() method compares two **string** to ... An automatic casting

ata type conversion) will take place when one type of data is ...

w.coe.uncc.edu/~sjkuyath/etee3286/Ch6/LexicalIssues&DataTypes.html - 71k - [Cached](#) -

[More from this site](#)

[p://grail.cba.csuohio.edu/~sanchita/cis260/classnotes/Simple_data.ppt](#)

ICROSOFT POWERPOINT)

re are some advantages of integer **data type**: ... C also provides an explicit **type**

nversion operation called a cast. Examples: ...

il.cba.csuohio.edu/~sanchita/cis260/classnotes/Simple_data.ppt - 64k - [View as html](#) - [More](#)

[on this site](#)

ata Types

recursive **data type** T is defined as a structure that may itself contain components of type T.

Explicit **Type Conversion** ...

w.cs.kent.edu/~durand/CS43101Fall2004/DataTypes.html - 64k - [Cached](#) - [More from this](#)

[site](#)

ata Types in the C Programming Language

quantity of bits used by each **data type** depends on the computer system being ... **Type**

nversion. When processing data, C allows mixing of the basic types ...

me.earthlink.net/~ircc.edu/cop2000/datatypesc.html - 82k - [Cached](#) - [More from this site](#)

ie GNU C Reference Manual

you should use the **char data type** specifically for storing ASCII characters ... sizeof

erator to obtain the size (in bytes) of the **data type** of its **operand**. ...

u.org/software/gnu-c-manual/gnu-c-manual.html#Primitive **Data Types** - 264k - [Cached](#) -

[More from this site](#)

ata Types (PDF)


data type is a collection of values and the definition of one or more ... The **shift operator** shifts the bits of the **operand** in the indicated direction, ...
cs.vt.edu/~cs1044/Notes/Chap09.Types.pdf - 30k - [View as html](#) - [More from this site](#)

however, treats an array of type **char** as a **string** if the ASCII value 0, the null ... The **data** **FILE** describes various features of a file. ...
ford.org/ecs/DataAndVisualization/FromC++ToC/material.htm - 53k - [Cached](#) - [More from this site](#)

[1](#) [2](#) [3](#) [4](#) [5](#) [6](#) [7](#) [8](#) [9](#) [10](#) [Next](#)

"data type" operand operator "type conversion" string char

Search

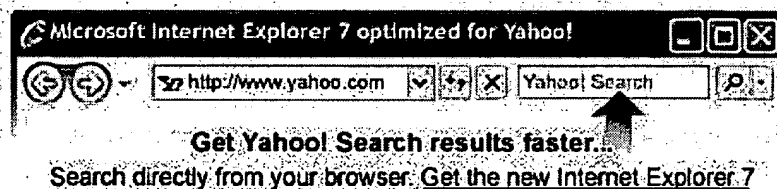

Copyright © 2006 Yahoo! Inc. All rights reserved. [Privacy Policy](#) - [Terms of Service](#) - [Copyright/IP Policy](#) - [Submit Your Site](#)